


Watertightness Tester WSP 3600

Agents exclusifs	
Version Vlies Courcier Sarl	
VVC ZA des Wattines, 5 Pavé d'Halluin F-59126 LINSELLES	T : 03.20.46.59.66 F : 03.20.03.17.38 info@vvc.fr

- corresponded to EN 1928 method A
- microprocessor controlled
- 3 inspection places
- magnetic inserting assistance
- inspection surface: $\varnothing 150$ mm
- sample size: $\varnothing 200$ mm
- maximum test pressure 600mm - optionally 1200mm
- test pressure is preselectable in 100mm steps
- testing period is preselectable: 1h, 2h (EN ISO 13859), 4h, 6h, 12h and 24h (EN 13984)
- automatic pressure re-adjusting over the entire testing period
- dimensions: 930 mm/450 mm/705 mm
(version with test pressure 1200 mm: 1305 mm)
- weight: approx. 50 kg
- operating voltage: 24 VDC (power pack 220 VAC/24 VDC)
- operating pressure: 6 bar of compressed air form

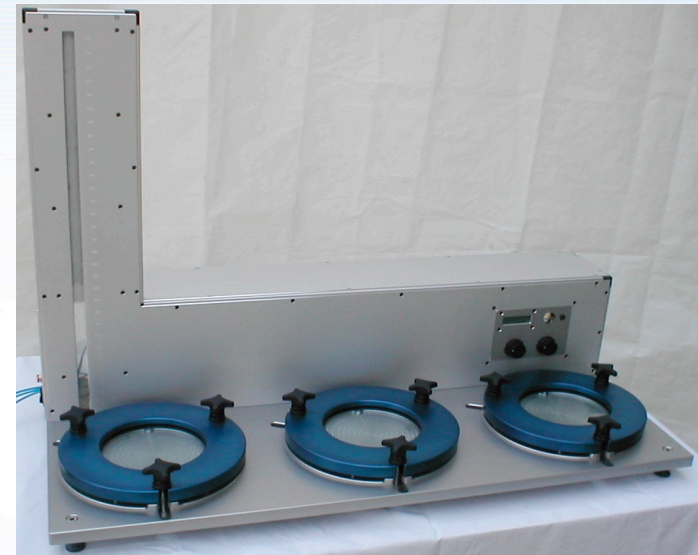

Subject to modifications in the interest of technical progress.